

8-WAY CASSETTES

MULTISPLIT INDOOR UNITS



IRC1F7C
(Standard)

Infrared remote
controller 8-WV
cassette



SWC735 (Optional)
398100775

Wired controller
with WiFi





SWC765 (Optional)
398100674

Wired controller
with weekly timer



SWC52V (Optional)
398800104

Centralized controller
up 36 units
(it requires wired
controller)

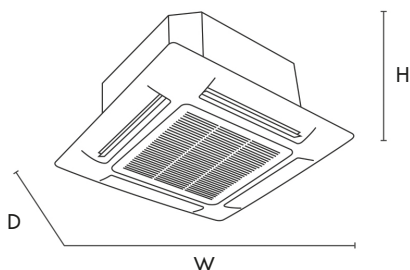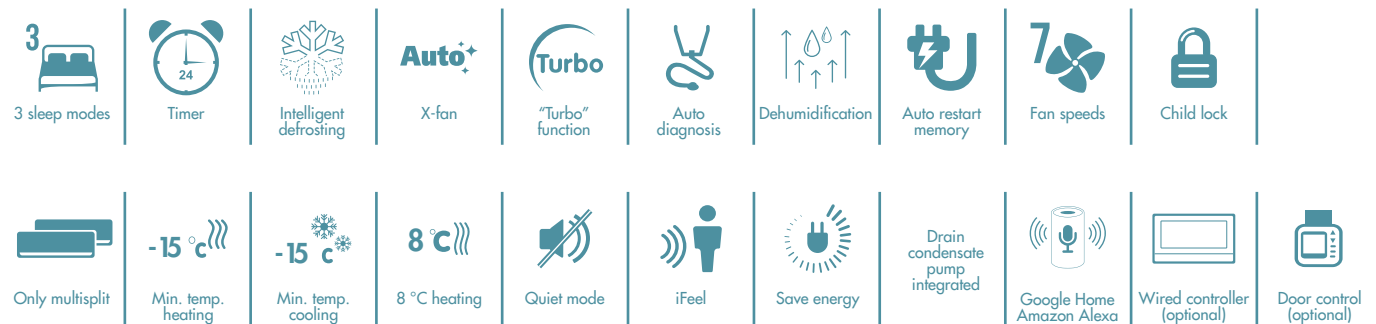

8-WAY CASSETTES		X3I ECO AS28HL		X3I ECO AS35HL		X3I ECO AS50HL		X3I ECO AS70HL	
	Units	Cooling	Heating	Cooling	Heating	Cooling	Heating	Cooling	Heating
Nominal capacity	kW	2.80	2.90	3.50	4.00	5.00	5.50	7.00	8.00
Air flow rate (sh.-h.-mh.-m.-ml.-l.-sl.)	m ³ /h	560-540-490-450-420-380-350		560-540-490-450-420-380-350		650-540-490-450-420-380-350		1100-1050-950-910-870-830-800	
Dehumidification	l/h	1.4		1.8		1.8		2.5	
Fan speed	n°	7+auto		7+auto		7+auto		7+auto	
Sound pressure (sh.-h.-mh.-m.-ml.-l.-sl.)	dB(A)	41-39-36-34-32-30-28		41-39-36-34-32-30-28		43-39-36-34-32-30-28		46-45-44-43-42-41-39	
Sound power U.I. (sh.-h.-mh.-m.-ml.-l.-sl.)	dB(A)	57-55-52-50-48-46-44		57-55-52-50-48-46-44		59-55-52-50-48-46-44		62-61-60-59-58-57-55	
Liquid pipe diameter	mm (inch)	6.35 (1/4")		6.35 (1/4")		6.35 (1/4")		6.35 (1/4")	
Gas pipe diameter	mm (inch)	9.52 (3/8")		9.52 (3/8")		12.7 (1/2")*		15.88 (5/8")*	
Indoor net dimension without grid (H./W./D.)	mm	265/570/570		265/570/570		265/570/570		240/840/840	
Indoor net dimension with grid (H./W./D.)	mm	312.5/620/620		312.5/620/620		312.5/620/620		292/950/950	
Net dimension grid (H./W./D.)	mm	47.5/620/620		47.5/620/620		47.5/620/620		52/950/950	
Indoor unit weight without grid	kg	17		17		17		29	
Panel net weight	kg	3		3		3		6	

*It requires the adaptor kit (supplied with the outdoor units)