



LOMO



Optional



Optional

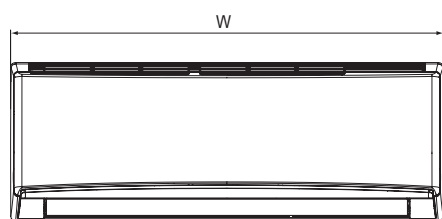

Potenza	H (mm)	W (mm)	D (mm)
7k - 9k	275	790	200
12k	289	845	209
18k	300	970	224
24k	325	1078	246

UNITÀ INTERNE A PARETE serie LOMO	Unità di misura	GWH07QB-K6DNB6C/I		GWH09QB-K6DNB6C/I GWH09QB-K6DNB6E/I		GWH12QC-K6DNB6C/I		GWH18QD-K6DNB6C/I		GWH24QE-K6DNB6C/I	
		Freddo	Caldo	Freddo	Caldo	Freddo	Caldo	Freddo	Caldo	Freddo	Caldo
Potenza resa	kW	2,1	2,6	2,6	2,8	3,5	3,67	5,13	5,28	6,45	6,45
Portata d'aria	m ³ /h	560/490/430/330		560-490-430-330		680-590-490-420		800-720-610-520		1250-1050-950-850	
Deumidificazione	l/h	0,6		0,8		1,4		1,8		2,0	
Velocità di ventilazione	n°	4		4		4		4		4	
Pressione sonora (sa.-a.-m.-b.)	dB(A)	36-34-32-28		37-35-32-26		42-38-34-31		49-44-39-34		49-44-41-39	
Potenza sonora U.I. (sa.-a.-m.-b.)	dB(A)	49/46/42/38		55-52-44-38		57/52/48/45		59-54-49-44		63-59-56-53	
Diametro del tubo liquido	mm(inch")	6,35(1/4")		6,35(1/4")		6,35(1/4")		6,35(1/4")		6,35(1/4")	
Diametro del tubo gas	mm(inch")	9,52(3/8")		9,52(3/8")		9,52(3/8")		12,7(1/2")		15,88(1/2")	
Dimensioni nette (Alt./Lar./Pro.)	mm	275/790/200		275/790/200		289/845/209		300/970/224		325/1078/246	
Peso netto	kg	9		9		10,5		13,5		16,5	