

SLIM DUCTED

NEW MULTISPLIT INDOOR UNITS





SWC73S (Standard)
398100775
Wired controller
with WiFi



SWC76S (Optional)
398100674
Wired controller
with weekly timer



SWC52V (Optional)
398800104
Centralized controller
up 36 units
(it requires wired
controller)

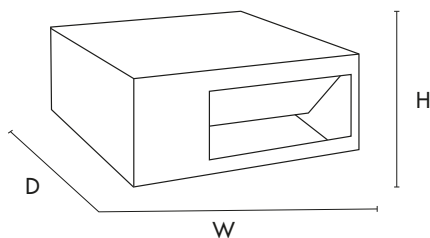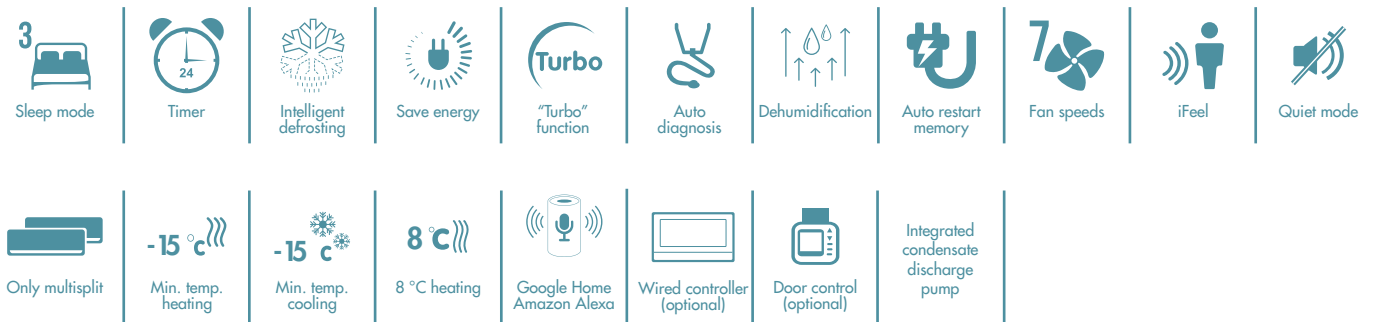

Ducted indoor units with adjustable external static pressure		X3I ECO SD27HL		X3I ECO SD35HL		X3I ECO SD50HL		X3I ECO SD70HL	
	Units	Cooling	Heating	Cooling	Heating	Cooling	Heating	Cooling	Heating
Capacity	kW	2.65	2.80	3.50	3.85	5.00	5.50	7.00	8.00
Air flow rate (sh.-h.-mh.-m.-ml.-l.-sl.)	m³/h	650-560-520-480-450-410-380		700-670-640-610-580-550-520		880-840-810-790-770-750-730		1500-1200-1200-1000-1000-900-900	
Min.-max. external static pressure	Pa	25-60		25-60		25-60		25-125	
Dehumidification	l/h	0.8		1.4		1.8		2.5	
Fan speed	n°	7 + auto		7 + auto		7 + auto		7 + auto	
Sound pressure (sh.-h.-mh.-m.-ml.-l.-sl.)	dB(A)	39-37-36-35-34-33-32		41-39-38-37-36-35-34		41-39-39-38-38-37-34		45-40-40-38-38-36-36	
Sound power (sh.-h.-mh.-m.-ml.-l.-sl.)	dB(A)	55-53-52-51-50-49-48		57-55-54-53-52-51-50		57-55-55-54-54-53-50		62-57-57-55-55-53-53	
Liquid pipe diameter	mm (inch)	6.35 (1/4")		6.35 (1/4")		6.35 (1/4")		6.35 (1/4")	
Gas pipe diameter	mm (inch)	9.52 (3/8")		9.52 (3/8")		12.7 (1/2")*		15.88 (1/2")*	
Net dimension (H./W./D.)	mm	200/710/450		200/710/450		200/1010/450		260/900/655	
Net weight	kg	18,5		19		25		31	

*It requires the adaptor kit (supplied with the outdoor units)