MULTISPLIT AIR CONDITIONERS

MAIN FEATURES

ARGO DUAL 18 DCI R32
ARGO TRIAL 21 DCI R32
ARGO TRIAL 24 DCI R32
ARGO QUADRI 28 DCI R32

X3MI ECO 105SH
X3MI ECO 120SH

Possibility of choice among different capacities and types of indoor units.

HIGH-WALL

CASSETTE



DUCTED

FLOOR/CEILING

CONSOLE

Compact design | Cold air prevention | Easy maintenance | Timer 24H | Intelligent defrosting | "Turbo" function | Auto diagnosis | High efficiency | Auto restart memory | Child lock

Low voltage start-up | Complete protection | Wide voltage | Action wide range | Central control | Long range monitoring | Wired controller (optional) | DC Inverter technology

A++ Cooling

A+ Heating

LOW AMBIENT COOLING AND HEATING

The ability to work down to -15°C of outdoor temperature, in both cooling and heating modes, ensures a high product reliability: when the outside temperature changes, the compressor frequency and fan speed adjust accordingly.

OUTDOOR UNITS

Model	Code	Cooling capacity (kW)	Heating capacity (kW)
ARGO DUAL 18 DCI R32	398000792	5,30	5,65
ARGO TRIAL 21 DCI R32	398000793	6,10	6,50
ARGO TRIAL 24 DCI R32	398000794	7,10	8,60
ARGO QUADRI 28 DCI R32	398000795	8,0	9,50
X3MI ECO 105SH	398000658	10,5	11
X3MI ECO 120SH	398000659	12	13

INDOOR UNITS

Model		Code
HIGH-WALL	X3I ECO PLUS 27 HL WF	398000699
	X3I ECO PLUS 35 HL WF	398000701
	X3I ECO PLUS 52 HL WF	398000703
	X3I ECO PLUS 70 HL WF	398000705
CASSETTE	X3I ECO AS 35 HL	398000661
	X3I ECO AS 45 HL	398000662
	X3I ECO CASSETTE GRID	X3IECO-AS-GRID
DUCTED	X3I ECO SD 25 HL	398000663
	X3I ECO SD 35 HL	398000664
	X3I ECO SD 52 HL	398000665
FLOOR/ CEILING	X3I ECO FC 26 HL	398000666
	X3I ECO FC 35 HL	398000667
	X3I ECO FC 45 HL	398000668
CONSOLE	X3I ECO PLUS AF 27 HL	398000739
	X3I ECO PLUS AF 35 HL	398000741
	X3I ECO AF 52 HL	398000671

DUCTED

MULTISPLIT INDOOR UNITS

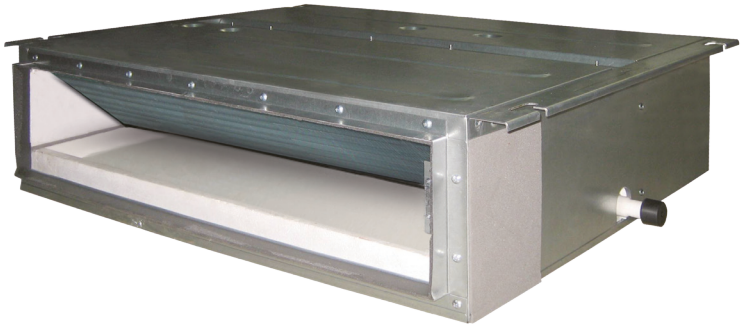

(Standard)

Infrared remote control and wired controller

(Optional)

Wired controller

Sleep comfort mode | Min. temp. heating | Min. temp. cooling | Timer | Intelligent defrosting | Only multisplit | Auto diagnosis | Dehumidification | Auto restart memory | Fan speeds | Drain condensate pump integrated | Filters easily removable for cleaning | Wired controller (optional)

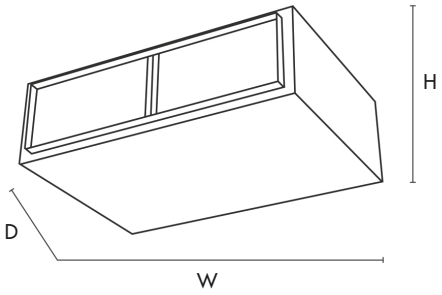

Slim ducted indoor units		X3I ECO SD25HL		X3I ECO SD35HL		X3I ECO SD50HL	
	Units	Cooling	Heating	Cooling	Heating	Cooling	Heating
Capacity	kW	2,50	2,80	3,5	3,85	5,0	5,5
Air flowrate (h.-m.-l.)	m^3/h	450-280-250		500-400-300		700-600-500	
Min.-max. static pressure	Pa	0-10		0-10		0-10	
Dehumidification	l/h	0,8		1,4		1,8	
Fan speeds	n°	3 + auto		3 + auto		3 + auto	
Sound pressure (h.-m.-l.)	dB(A)	37-34-31		39-35-32		41-36-33	
Sound power (h.-m.-l.)	dB(A)	47-44-41		49-45-42		50-46-43	
Liquid pipe diameter	mm (")	6,35 (1/4")		6,35 (1/4")		6,35 (1/4")	
Gas pipe diameter	mm (")	9,52 (3/8")		9,52 (3/8")		12,7 (1/2")	
Net dimension Outdoor (H/W/D)	mm	200/700/615		200/700/615		200/900/615	
Net weight Indoor/Outdoor	Kg	22		23		27	

CONTROLS

SINGLE AND MULTISPLIT AIR CONDITIONERS

		High-wall	Cassette	Ducted	Floor/ ceiling	Console
WIRELESS		●				
WIRELESS			●	●	●	
WIRELESS						●
WIRED				●		
WIRED	398100674	●	●	●	●	●
DOOR CONTROL	398100673	●				

● Standard controller supplied with the unit

● Optional controller
398100674 - Wired control
398100673 Door control