

console

multisplit indoor units



(Standard)
Infrared remote control



(Optional)
Wired controller



Sleep comfort mode

8°C heating

LED



Timer



Intelligent defrosting



Energy saving



"Turbo" function



Auto diagnosis



Dehumidify



Auto restart memory



Fan speeds



iFeel



Only multisplit

-15°C

Min. temp. heating




-15°C

Min. temp. cooling



Wired controller (optional)

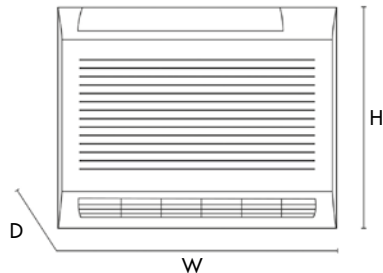

Console Indoor units		X3I ECO AF25HL		X3I ECO AF35HL		X3I ECO AF50HL	
	Units	Cooling	Heating	Cooling	Heating	Cooling	Heating
Capacity	kW	2,7	2,8	3,5	3,85	5,2	5,33
Air flowrate (sh.-h.-mh.-m.-ml.-l.-sl.)	m³/h	500-430-410-370-330-280-250		600-520-480-440-400-360-280		650-620-550-500-450-410-320	
Dehumidification	l/h	0,8		1,4		1,8	
Fan speeds	n°	7		7		7	
Sound pressure (sh.-h.-mh.-m.-ml.-l.-sl.)	dB(A)	40-36-34-32-30-26-23		42-40-38-36-34-31-25		47-45-42-40-37-35-31	
Sound power (sh.-h.-mh.-m.-ml.-l.-sl.)	dB(A)	52-48-46-44-42-38-34		52-50-48-46-44-41-35		57-55-52-50-47-45-41	
Liquid pipe diameter	mm (")	6,35 (1/4")		6,35 (1/4")		6,35 (1/4")	
Gas pipe diameter	mm (")	9,52 (3/8")		9,52 (3/8")		12,7 (1/2")	
Net dimension Outdoor (H/W/D)	mm	600/700/215		600/700/215		600/700/215	
Net weight Indoor/Outdoor	Kg	15		15,5		15,5	